



High-end Power Semiconductor Manufacturer

ZP3300A 6900-8000V Standard Rectifier Diode

- High power cycling capability
- Low on-state and switching losses
- Optimized for line frequency rectifiers
- Designed for traction and industrial applications



Average forward current		I _{FAV}	3360 A				
Repetitive peak reverse voltage		V _{RRM}	6900 – 8000 V				
V _{RRM} , V	6900	7000	7200	7400	7600	7800	8000
Voltage code	69	70	72	74	76	78	80
T _j , °C	-40 – 150						


MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I _{FAV}	Average forward current	A	3360	T _c =100 °C; Double side cooled; 180° half-sine wave; 50 Hz	
I _{FRMS}	RMS forward current	A	5300	T _c =100 °C	
I _{FSM}	Surge forward current	kA	53.0	T _j =T _{j max}	180° half-sine wave; (t _p =10 ms); V _R =0 V;
I ² t	Safety factor	A ² s·10 ⁴	1404.5	T _j =T _{j max}	180° half-sine wave; (t _p =10 ms)
BLOCKING					
V _{RRM}	Repetitive peak reverse voltages	V	6900-8000	T _{j min} < T _j <T _{j max} ; 180° half-sine wave	
V _{RSM}	Non-repetitive peak reverse voltages	V	7400-8500	T _j =25, 150°C; I _{RRM} ≤400mA; V _R =V _{RRM} ; t _p =10ms	
THERMAL					
T _{stg}	Storage temperature	°C	-40-150		
T _j	Operating junction temperature	°C	-40-150		
MECHANICAL					
F	Mounting force	kN	90.0		

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions
ON-STATE				
V_{FM}	Peak forward voltage, max	V	2.05	$T_j=150\text{ }^{\circ}\text{C}; I_{TM}=6000\text{ A}$
$V_{F(TO)}$	Forward threshold voltage, max	V	1.21	
r_T	Forward slope resistance, max	$\text{m}\Omega$	0.140	$T_j=T_{j\max}$
BLOCKING				
I_{RRM}	Repetitive peak reverse current, max	mA	400	$T_j=T_{j\max}; V_R=V_{RRM}$
THERMAL				
R_{thjc}	Thermal resistance, junction to case, max	$^{\circ}\text{C}/\text{W}$	0.0057	
R_{thck}	Thermal resistance, case to heatsink, max	$^{\circ}\text{C}/\text{W}$	0.002	
MECHANICAL				
w	Weight, typ	g	2500	

OVERALL DIMENSIONS

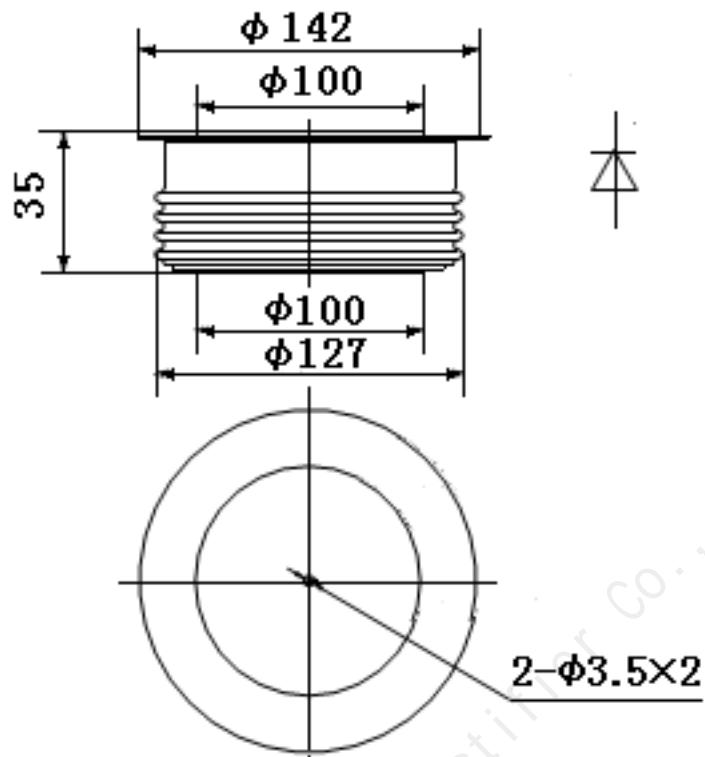

ZT110DT

All dimensions in millimeters

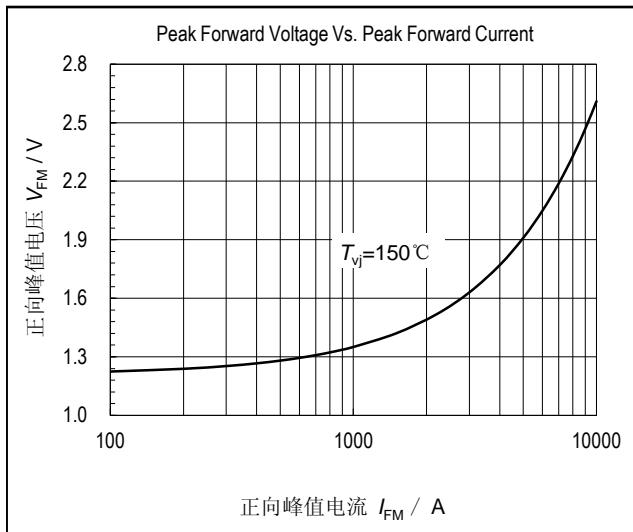


图1. 正向伏安特性曲线

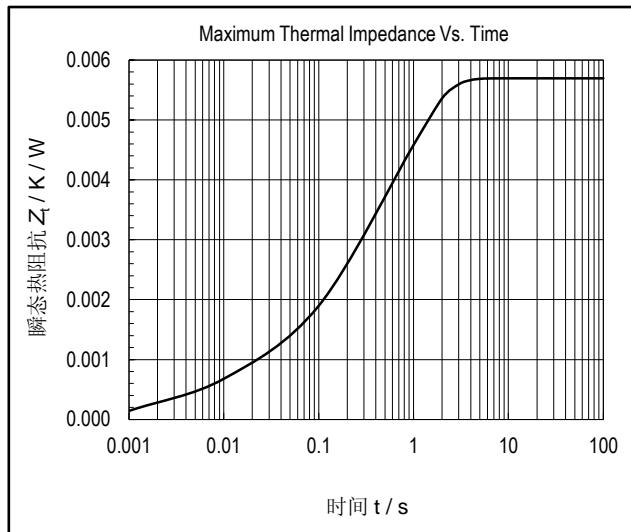


图2. 瞬态热阻抗曲线

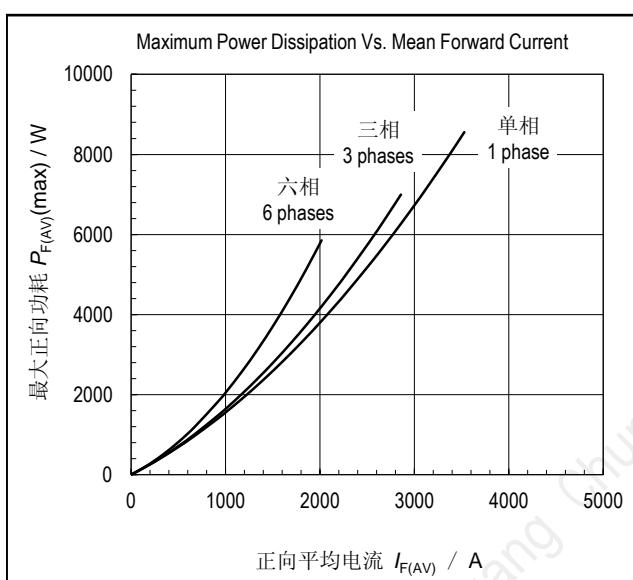


图3. 最大正向功耗与正向平均电流的关系曲线

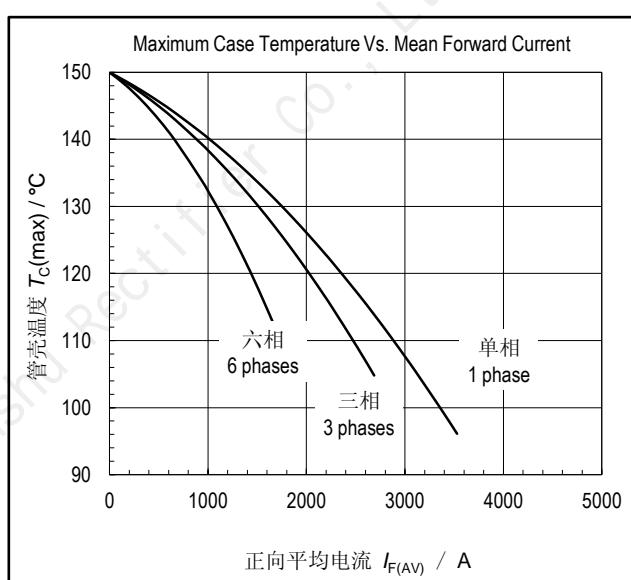


图4. 管壳温度与正向平均电流的关系曲线

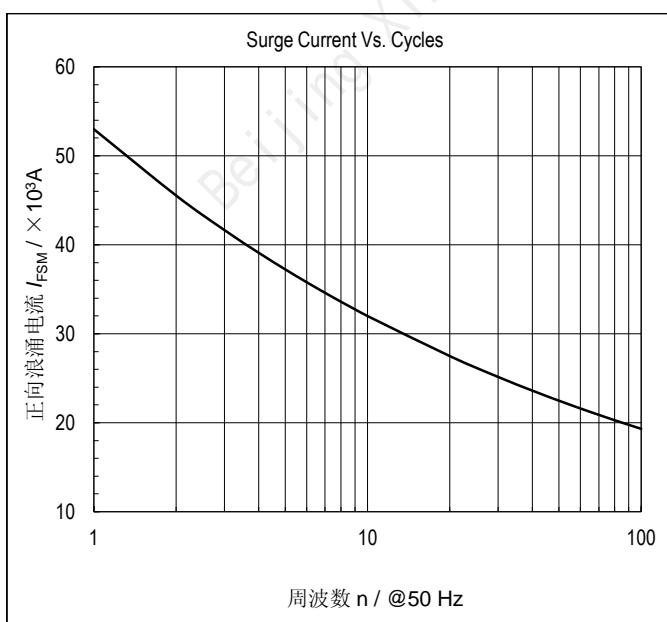


图5. 正向浪涌电流与周波数的关系曲线

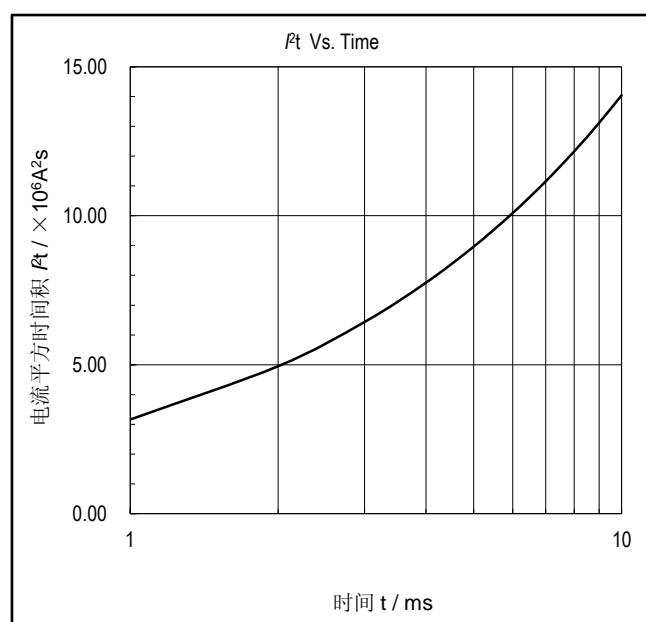


图6. I^2t 特性曲线