



High-end Power Semiconductor Manufacturer

ZP5600A 4300-5000V

Standard Rectifier Diode

- High power cycling capability
- Low on-state and switching losses
- Optimized for line frequency rectifiers
- Designed for traction and industrial applications



Average forward current		I_{FAV}	5650 A		
Repetitive peak reverse voltage		V_{RRM}	4300–5000 V		
V_{RRM} , V	4300	4400	4600	4800	5000
Voltage code	43	44	46	48	50
T_j , °C			-60 – 150		


MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	5650	$T_c=85$ °C; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	60.0	$T_j=T_{j\max}$	180° half-sine wave; ($t_p=10$ ms); $V_R=0.6V_{RRM}$
I^2t	Safety factor	$A^2s \cdot 10^3$	18000	$T_j=T_{j\max}$	180° half-sine wave; ($t_p=10$ ms); $V_R=0.6V_{RRM}$
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	4300–5000	$t_p=10$ ms; $T_j=T_{j\max}$	
THERMAL					
T_{stg}	Storage temperature	°C	-40–160		
T_j	Operating junction temperature	°C	-60–150		
MECHANICAL					
F	Mounting force	kN	81.0–108.0		

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions
ON-STATE				
V_{FM}	Peak forward voltage, max	V	2.00	$T_j=25\text{ }^{\circ}\text{C}$; $I_{FM}=5000\text{ A}$; $F=108\text{kN}$
$V_{F(TO)}$	Forward threshold voltage, max	V	0.91	$T_j=T_{j\max}$;
r_T	Forward slope resistance, max	$\text{m}\Omega$	0.10	
BLOCKING				
I_{RRM}	Repetitive peak reverse current, max	mA	300	$T_j=T_{j\max}$; $V_R=V_{RRM}$
 THERMAL				
R_{thjc}	Thermal resistance, junction to case, max	$^{\circ}\text{C}/\text{W}$	0.0050	At 180° sine; double side cooled Clamping force 108kN
R_{thck}	Thermal resistance, case to heatsink, max	$^{\circ}\text{C}/\text{W}$	0.0015	
MECHANICAL				
w	Weight, typ	g	2000	

OVERALL DIMENSIONS

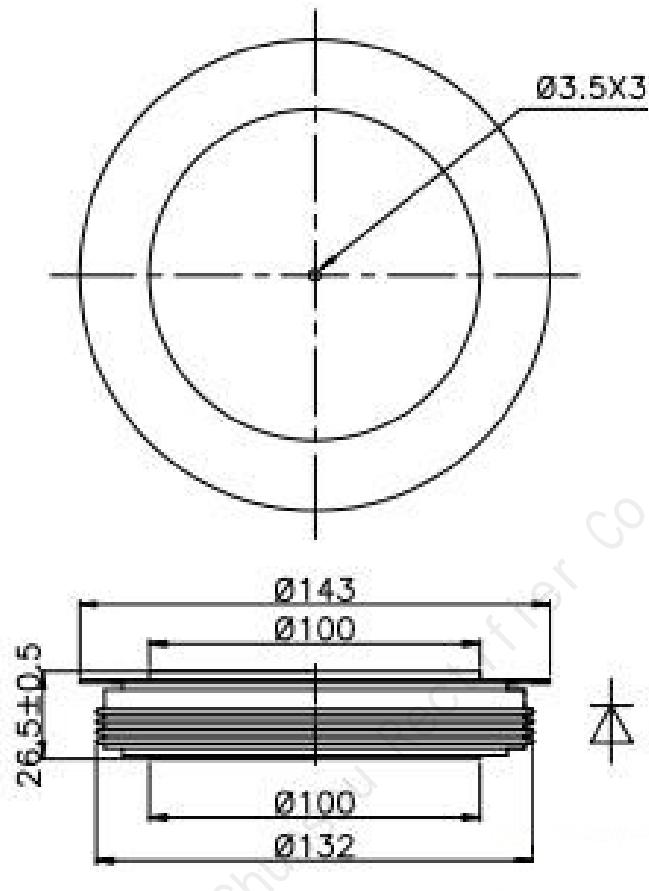

ZT110

All dimensions in millimeters

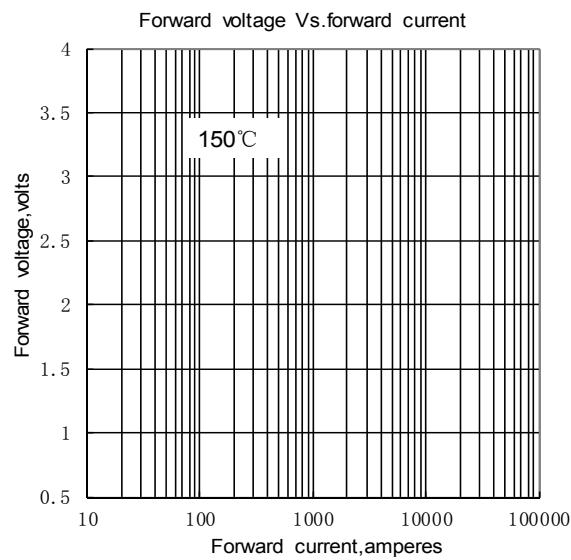


Fig.1

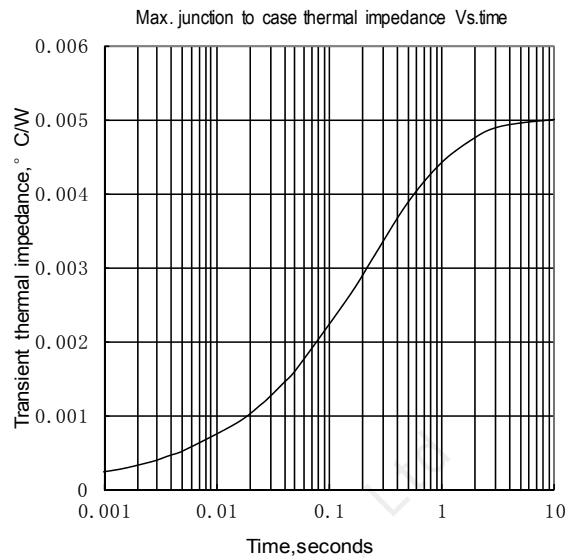


Fig.2

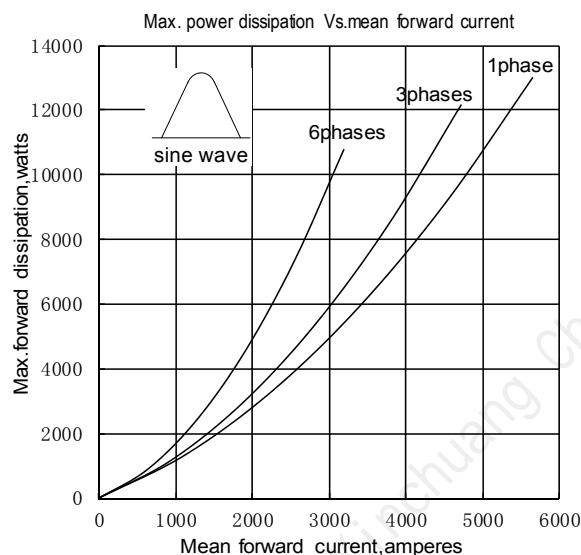


Fig.3

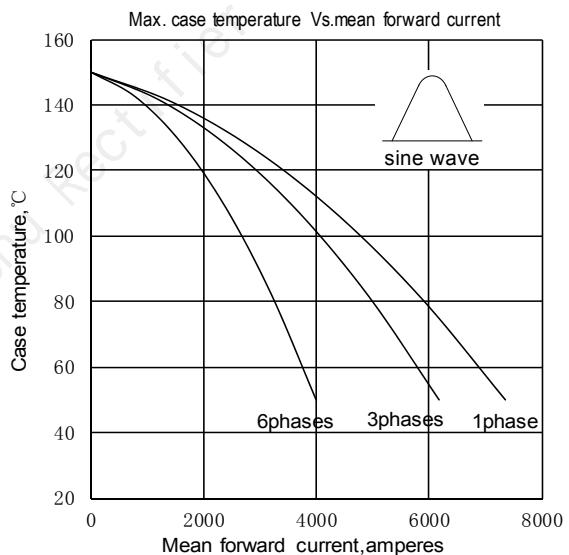


Fig.4

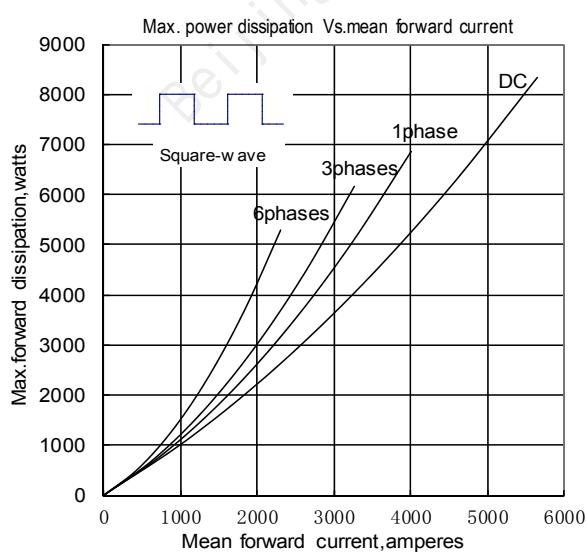


Fig.5

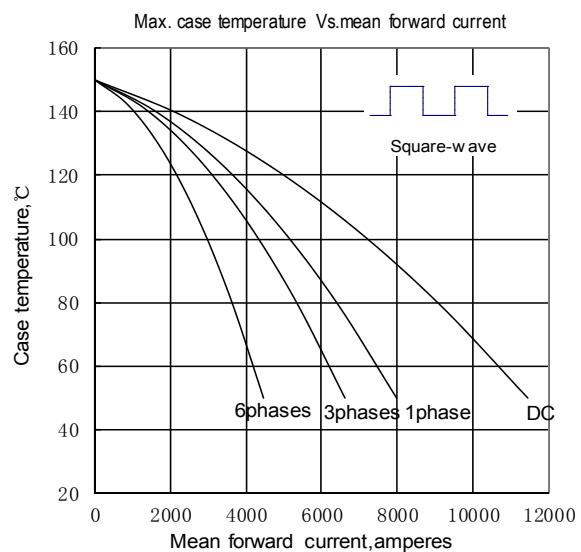


Fig.6

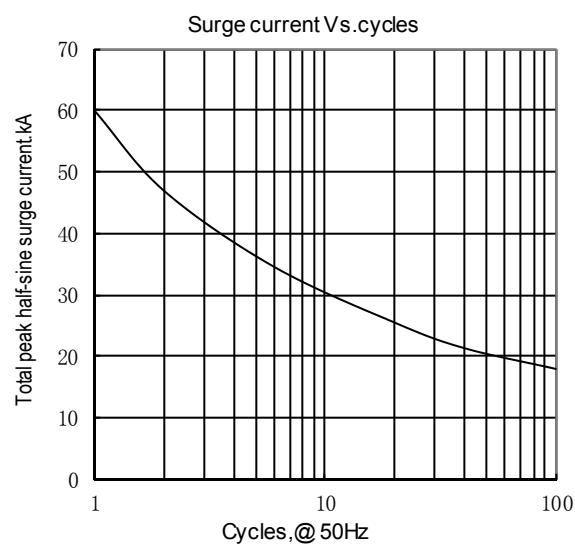


Fig7

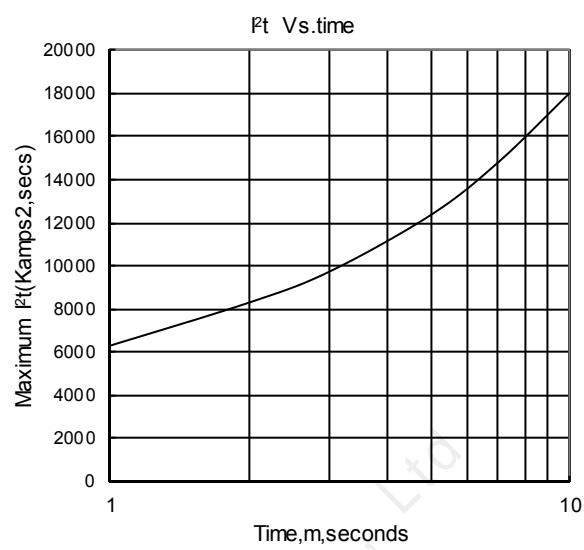


Fig8