



High-end Power Semiconductor Manufacturer

ZK2600A 1100-2000V

Fast Recovery Diode

- Low switching losses
- Low reverse recovery charge High
- power cycling capability



Average forward current			I_{FAV}	2620 A		
Repetitive peak reverse voltage			V_{RRM}	1100 – 2000 V		
Reverse recovery time			t_{rr}	7.00 μs		
V_{RRM} , V	1100	1200	1400	1600	1800	2000
Voltage code	11	12	14	16	18	20
T_j , °C	– 60 – 150					


MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	2620	$T_c=85\text{ }^{\circ}\text{C}$; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	31.0	$T_j=T_{j\max}$	180° half-sine wave; $t_p=10\text{ ms}$; $V_R=0.6V_{RRM}$
I^2t	Safety factor	$A^2s\cdot 10^3$	4805	$T_j=T_{j\max}$	180° half-sine wave; $t_p=10\text{ ms}$; $V_R=0.6V_{RRM}$
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	1100–2000	$t_p=10\text{ ms}$	
V_R	Reverse continuous voltages	V	$0.6\cdot V_{RRM}$	$T_j=T_{j\max}$;	
THERMAL					
T_{stg}	Storage temperature	$^{\circ}\text{C}$	–40–160		
T_j	Operating junction temperature	$^{\circ}\text{C}$	–60 –150		
MECHANICAL					
F	Mounting force	kN	30 – 40		

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions	
ON-STATE					
V _{FM}	Peak forward voltage, max	V	2.80	T _j =25 °C; I _{TM} =5000A, F=35.0kN	
V _{F(TO)}	Forward threshold voltage, max	V	1.10	T _j =T _{j max} ;	
r _T	Forward slope resistance, max	mΩ	0.15		
BLOCKING					
I _{RRM}	Repetitive peak reverse current, max	mA	195	T _j =T _{j max} ; V _R =V _{RRM}	
SWITCHING					
Q _{rr}	Total recovered charge, max	μC	1000	I _{TM} =2000A, t _p =2000μs, -di/dt=60A/μs, V _R =50V	
t _{rr}	Reverse recovery time ¹⁾ , max	μs	7.00		
THERMAL					
R _{thjc}	Thermal resistance, junction to case, max	°C/W	0.0120	Clamping force 35.0kN	Double side cooled
R _{thck}	Thermal resistance, case to heatsink, max	°C/W	0.0030	Clamping force 35.0kN	Double side cooled
MECHANICAL					
w	Weight, max	g	880		

OVERALL DIMENSIONS

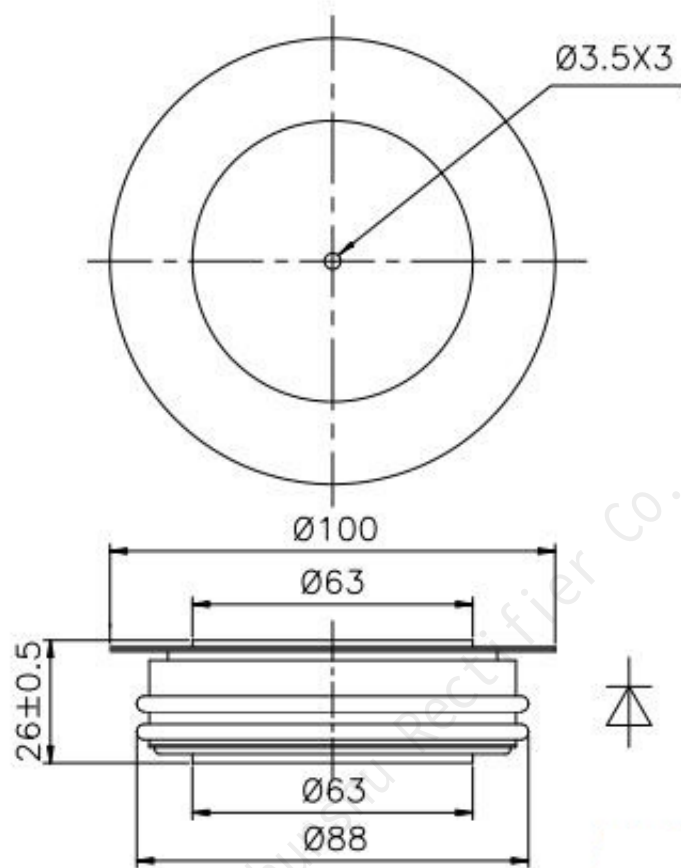

ZT70

All dimensions in millimeters