

Features:

- Isolated mounting base 2500V
- Solder joint technology
- Space and weight savings

Typical Applications

- DC Power supplies for equipments.
- DC supply for PWM inverter
- Inverter Welder

I_o	150 A
V_{RRM}	2200 V
I_{FSM}	1.5 KA
I²t	11.25 10³A²S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _o	DC output current	Single-phase full wave rectifying circuit, T _c =100°C	150			150	A
I _{RRM}	Repetitive peak current	at V _{RRM}	150			12	mA
I _{FSM}	Surge forward current	10ms half sine wave V _R =0	150			1.5	KA
I ² t	I ² T for fusing coordination					11.25	A ² s*10 ³
V _{FO}	Threshold voltage		150			0.75	V
r _F	Forward slop resistance					1.9	mW
V _{FM}	Peak forward voltage	I _{FM} =230A	25			1.55	V
R _{th(j-c)}	Thermal resistance Junction to case	Single side cooled, per total				0.10	°C /W
R _{th(c-h)}	Thermal resistance case to heatsink	Single side cooled, per total				0.07	°C /W
V _{iso}	Isolation voltage	50Hz,R.M.S,t=1min,I _{iso} :1mA(max)		2500			V
F _m	Terminal connection torque(M6)				6.0		N·m
	Mounting torque(M6)				6.0		N·m
T _{vj}	Junction temperature			-40		150	°C
T _{stg}	Stored temperature			-40		125	°C
W _t	Weight				200		g
Outline	T14						

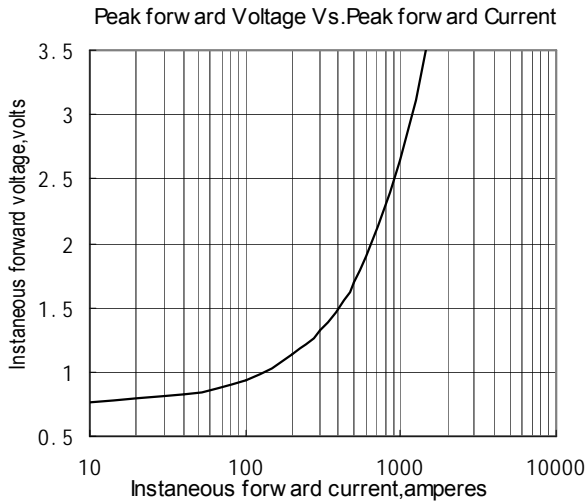


Fig.1

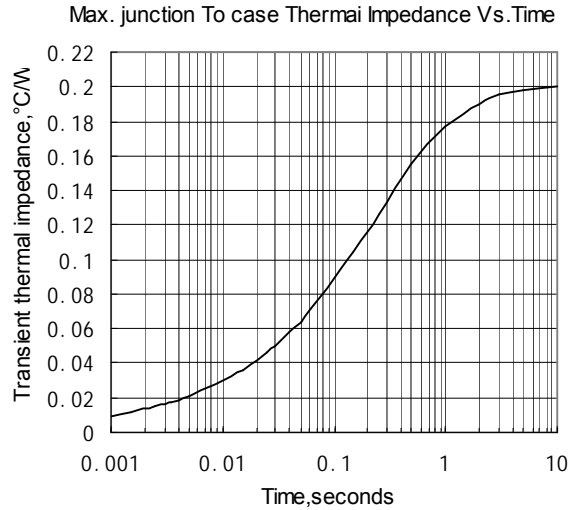


Fig.2

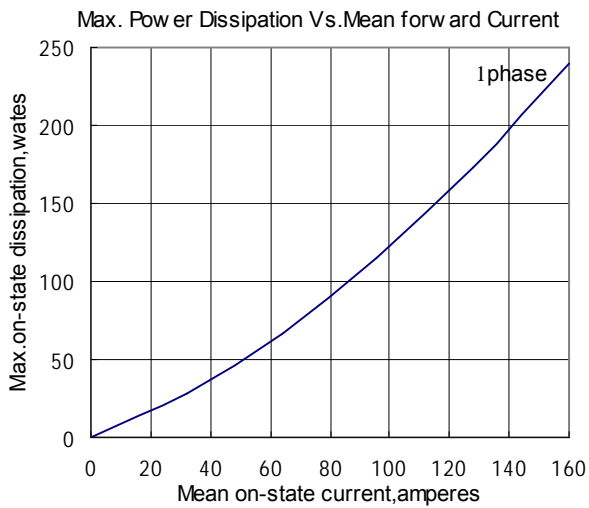


Fig.3

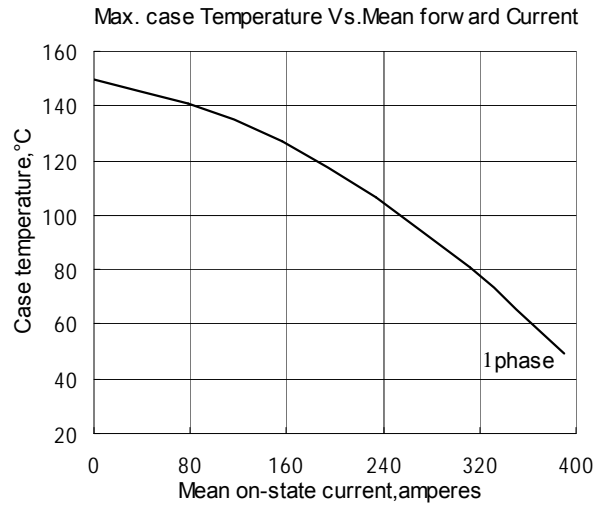


Fig.4

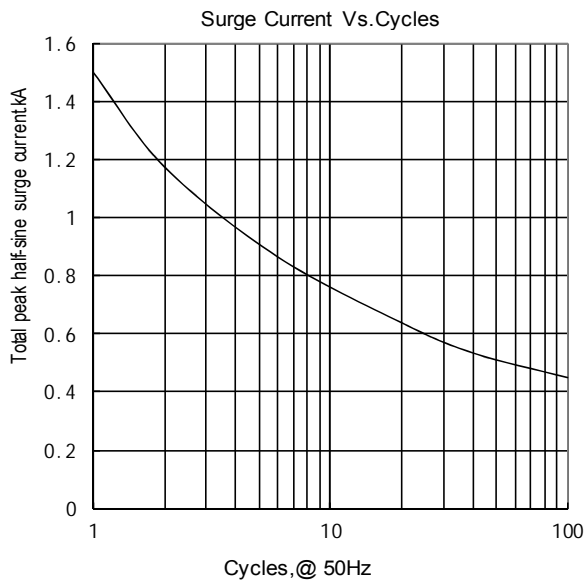


Fig.5



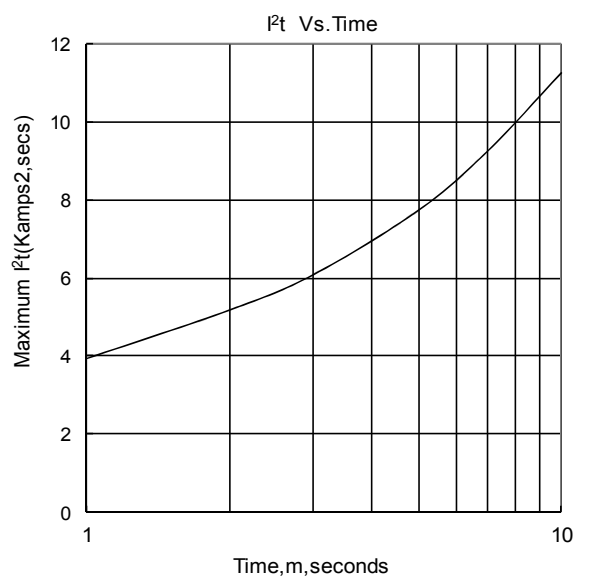


Fig.6

Outline:

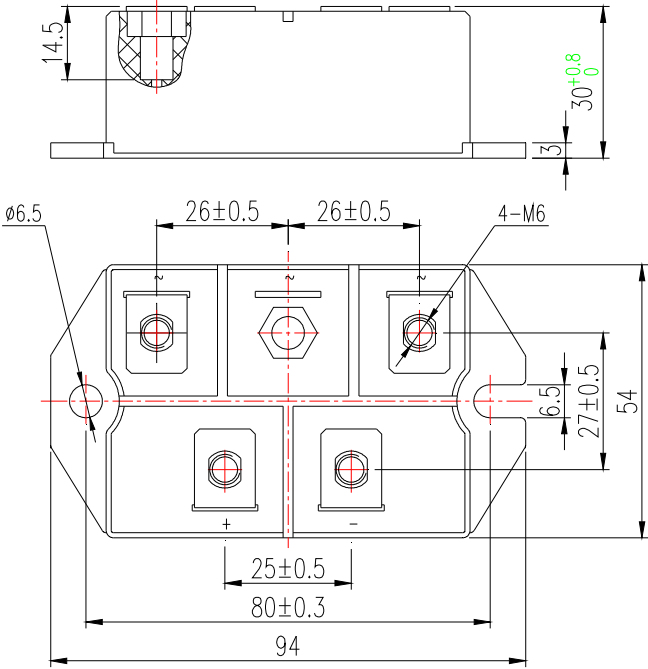

T14