



High-end Power Semiconductor Manufacturer

KP1600A 6300V-6800V Phase Control Thyristor

- High power cycling capability
- Low on-state and switching losses
- Designed for traction and industrial applications



Mean on-state current		I_{TAV}		1600 A	
Repetitive peak off-state voltage		V_{DRM}		6300 – 6800 V	
Repetitive peak reverse voltage		V_{RRM}			
Turn-off time		t_q		800 μ s	
V_{DRM}, V_{RRM}, V	6300	6400	6600	6800	
Voltage code	63	64	66	68	
$T_j, ^\circ\text{C}$	-40 – 125				

MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{TAV}	Mean on-state current	A	1600	$T_c=70\text{ }^{\circ}\text{C}$; 180° half-sine wave;	
I_{TRMS}	RMS on-state current	A	2512	$T_c=70\text{ }^{\circ}\text{C}$	
I_{TSM}	Surge on-state current	kA	32.0	$T_j=T_{j\text{ max}}$	180° half-sine wave; ($t_p=10\text{ ms}$); $V_R=0\text{ V}$;
I^2t	Safety factor	$A^2s\cdot 10^4$	512		180° sine wave; ($t_p=10\text{ ms}$);
BLOCKING					
V_{DRM}, V_{RRM}	Repetitive peak off-state and Repetitive peak reverse voltages	V	6300-6800	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; 50 Hz; Gate open	
V_{DSM}, V_{RSM}	Non-repetitive peak off-state and Non-repetitive peak reverse voltages	V	7200-7700	$T_{vj} = 25, 125\text{ }^{\circ}\text{C}$; $I_{DRM}, I_{RRM} \leq 600\text{ mA}$; $V_{DM} = V_{DRM}$; $V_{RM} = V_{RRM}$; $t_p= 10\text{ ms}$; Gate open	


TRIGGERING				
I_{FGM}	Peak forward gate current	A	4	
V_{RGM}	Peak reverse gate voltage	V	5	
P_G	Gate power dissipation	W	20	
SWITCHING				
$(di_T/dt)_{crit}$	Critical rate of rise of on-state current non-repetitive	A/ μ s	200	$T_{vj} = 125\text{ }^{\circ}\text{C}$; $V_{DM} = 0.67 V_{DRM}$; $f = 50\text{ Hz}$; $I_{TM} = 3000\text{ A}$; $I_{FG} = 2\text{ A}$; $t_r = 0.5\text{ }\mu\text{s}$
THERMAL				
T_{stg}	Storage temperature	$^{\circ}\text{C}$	-40-140	
T_j	Operating junction temperature	$^{\circ}\text{C}$	-40-125	
MECHANICAL				
F	Mounting force	kN	70.0	

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions
ON-STATE				
V_{TM}	Peak on-state voltage, max	V	2.50	$T_j = 125\text{ }^{\circ}\text{C}$; $I_{TM} = 3000\text{ A}$
$V_{T(TO)}$	On-state threshold voltage, max	V	1.25	$T_j = T_{j\text{ max}}$
r_T	On-state slope resistance, max	m Ω	0.420	
I_L	Latching current, max	mA	1000	$T_j = 25\text{ }^{\circ}\text{C}$
I_H	Holding current, max	mA	200	$T_j = 25\text{ }^{\circ}\text{C}$
BLOCKING				
I_{DRM}, I_{RRM}	Repetitive peak off-state and Repetitive peak reverse currents, max	mA	600	$T_j = 25\text{ }^{\circ}\text{C}, 125\text{ }^{\circ}\text{C}$; V_{DRM}/V_{RRM} ; Gate open
$(dv_D/dt)_{crit}$	Critical rate of rise of off-state voltage ¹⁾ , min	V/ μ s	2000	$T_j = T_{j\text{ max}}$; $V_D = 0.67 \cdot V_{DRM}$; Gate open
TRIGGERING				
V_{GT}	Gate trigger direct voltage, max	V	3.00	$T_j = 25\text{ }^{\circ}\text{C}$
I_{GT}	Gate trigger direct current, max	mA	300	$T_j = 25\text{ }^{\circ}\text{C}$
V_{GD}	Gate non-trigger direct voltage, min	V	0.30	$T_j = T_{j\text{ max}}$; $V_D = 0.4 \cdot V_{DRM}$;
SWITCHING				
t_q	Turn-off time ²⁾ , max	μ s	800	$T_{vj} = 125\text{ }^{\circ}\text{C}$; $V_{DM} = 0.67 V_{DRM}$; $I_T = 2000\text{ A}$; $dv/dt = 20\text{ V}/\mu\text{s}$; $V_R = 200\text{ V}$; $-di/dt = 1.5\text{ A}/\mu\text{s}$
Q_{rr}	Total recovered charge, max	μ C	5000	$T_{vj} = 125\text{ }^{\circ}\text{C}$; $-di/dt = 1.5\text{ A}/\mu\text{s}$; $I_T = 2000\text{ A}$; $V_R = 200\text{ V}$
I_{rrM}	Peak reverse recovery current, max	mA	600	$T_{vj} = 25\text{ }^{\circ}\text{C}, 125\text{ }^{\circ}\text{C}$; V_{DRM}/V_{RRM} Gate open

THERMAL

R_{thjc}	Thermal resistance, junction to case, max	$^{\circ}\text{C/W}$	0.009	Direct current
R_{thck}	Thermal resistance, case to heatsink, max	$^{\circ}\text{C/W}$	0.002	Direct current
MECHANICAL				
w	Weight, typ	g	1670	

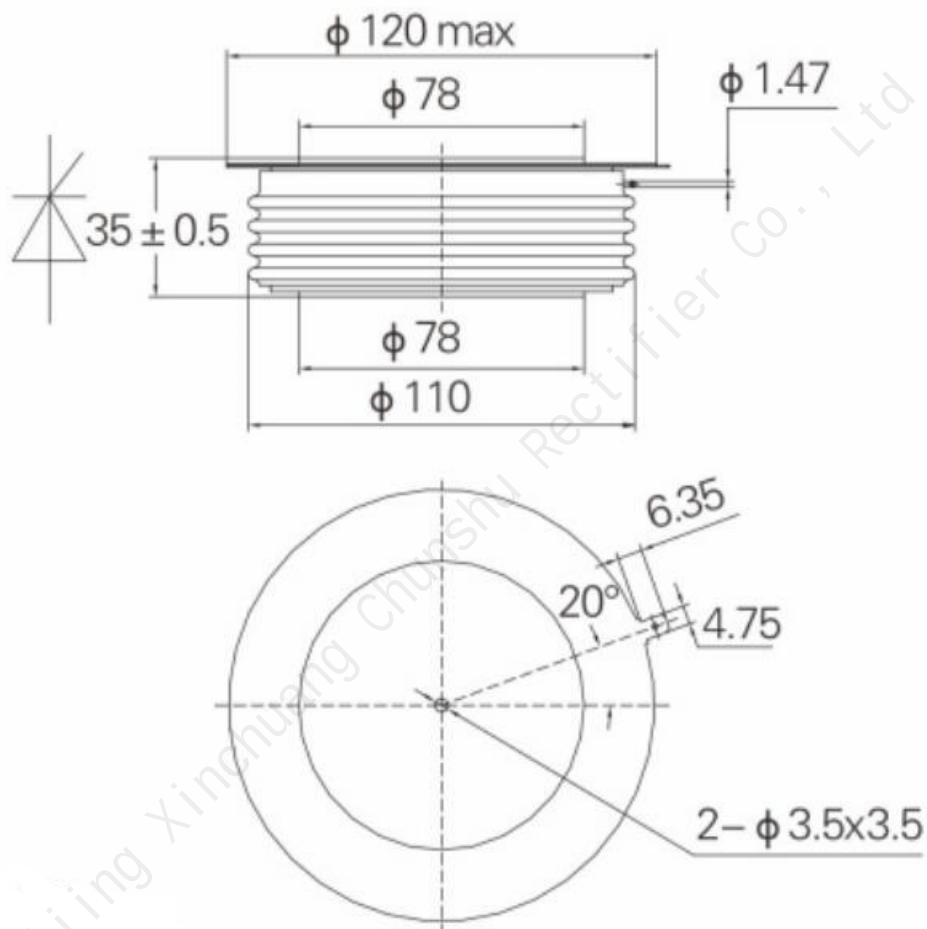OVERALL DIMENSIONS

KT85DT

All dimensions in millimeters

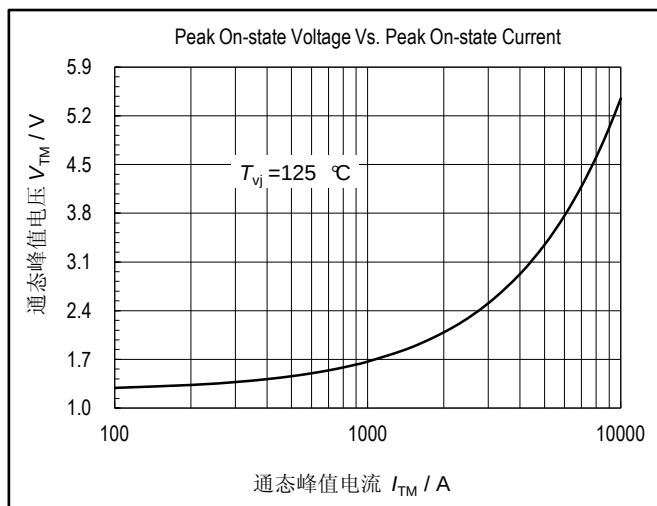


图1. 通态伏安特性曲线

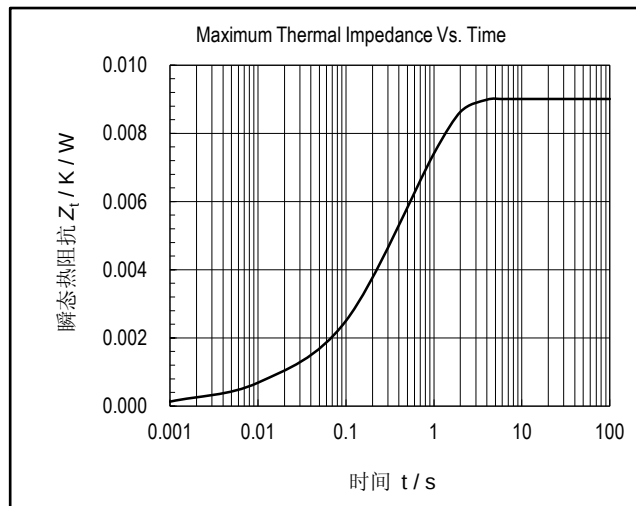


图2. 瞬态热阻抗曲线

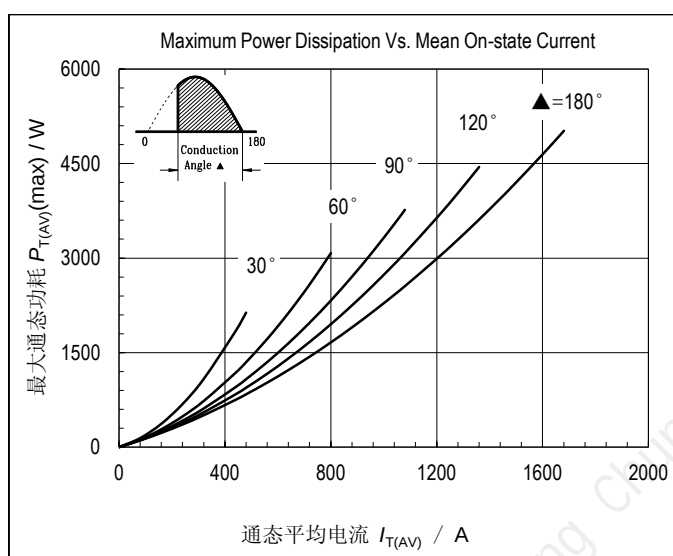


图3. 最大功耗与通态平均电流的关系曲线

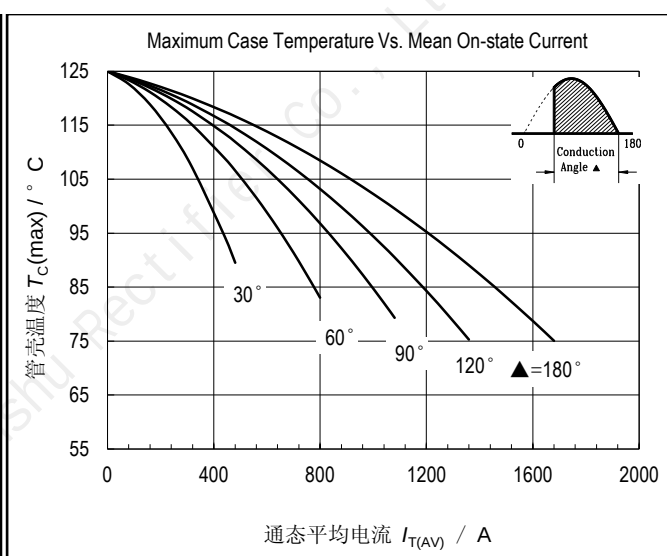


图4. 管壳温度与通态平均电流的关系曲线

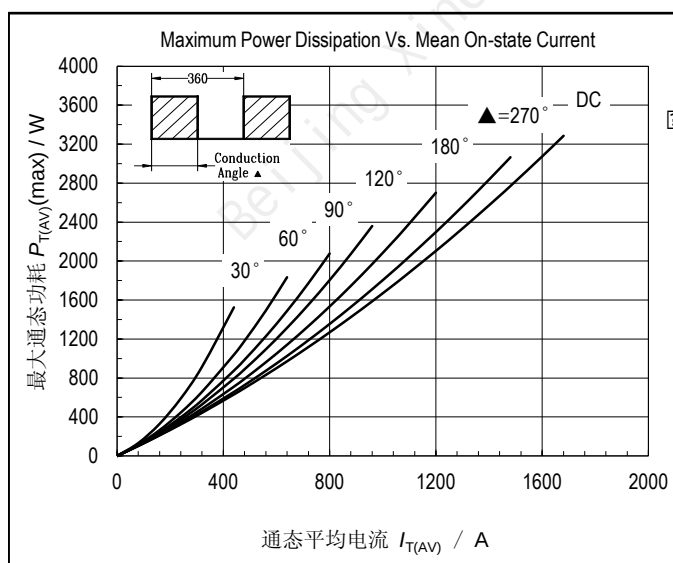


图5. 最大通态功耗与通态平均电流的关系曲线

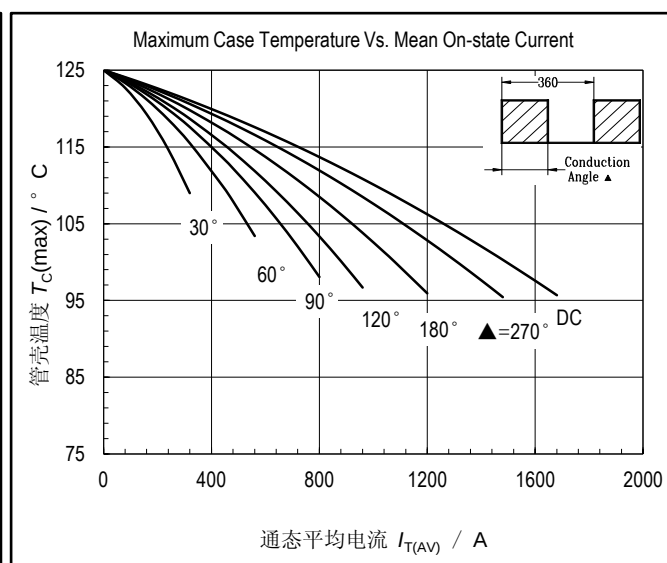


图6. 管壳温度与通态平均电流的关系曲线

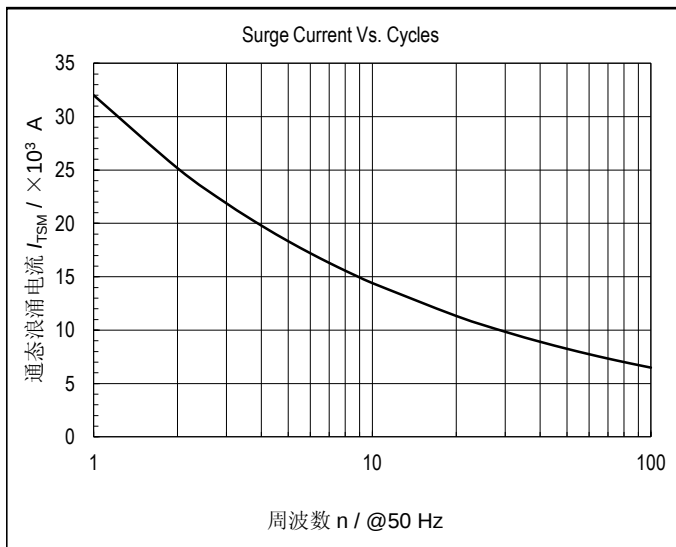


图7. 通态浪涌电流与周波数的关系曲线

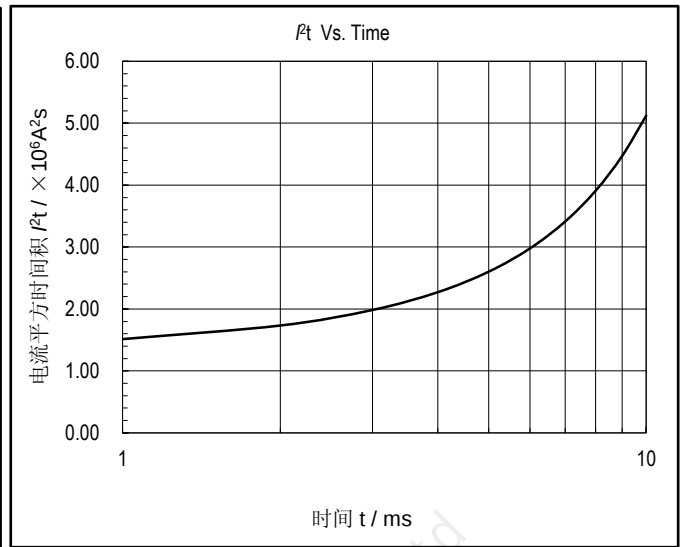


图8. I^2t 特性曲线

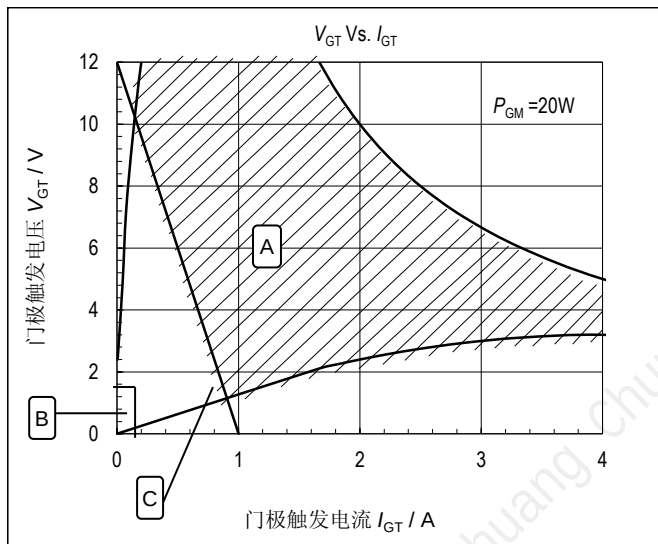


图9. 门极触发特性曲线

A为可靠触发区，
B为不可靠触发区。
C为建议采用的门极负载线。

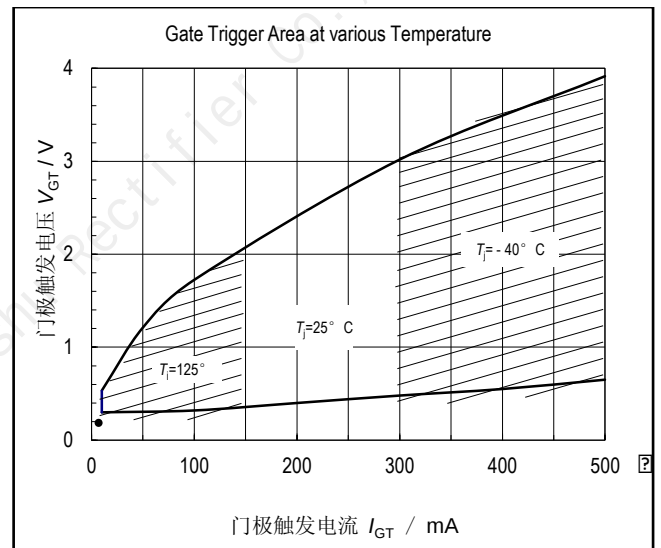


图10. 不同结温下的门极触发区

A is Recommended Triggering Area.
B is Unreliable Triggering Area.
C is Recommended Gate Load Line.