



High-end Power Semiconductor Manufacturer

ZK700A 2100-3000V Fast Recovery Diode

- Low switching losses
- Low reverse recovery charge High
- power cycling capability



Average forward current				I_{FAV}	720 A	
Repetitive peak reverse voltage				V_{RRM}	2100 – 3000 V	
Reverse recovery time				t_{rr}	4.00 μ s	
V_{RRM} , V	2100	2200	2400	2600	2800	3000
Voltage code	21	22	24	26	28	30
T_j , °C	– 60 – 150					


MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	720	$T_c=85\text{ }^{\circ}\text{C}$; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	10.0	$T_j=T_{j\text{ max}}$	180° half-sine wave; $t_p=10\text{ ms}$; $V_R=0.6V_{\text{RRM}}$
I^2t	Safety factor	$A^2s\cdot 10^3$	500	$T_j=T_{j\text{ max}}$	180° half-sine wave; $t_p=10\text{ ms}$; $V_R=0.6V_{\text{RRM}}$
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	2100–3000	$t_p=10\text{ ms}$	
V_R	Reverse continuous voltages	V	$0.6\cdot V_{\text{RRM}}$	$T_j=T_{j\text{ max}}$;	
THERMAL					
T_{stg}	Storage temperature	$^{\circ}\text{C}$	–40–160		
T_j	Operating junction temperature	$^{\circ}\text{C}$	–60 –150		
MECHANICAL					
F	Mounting force	kN	10 – 20		

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions	
ON-STATE					
V _{FM}	Peak forward voltage, max	V	2.90	T _j =25 °C; I _{TM} =1000A, F=15.0kN	
V _{F(TO)}	Forward threshold voltage, max	V	1.78	T _j =T _{j max} ;	
r _T	Forward slope resistance, max	mΩ	0.45		
BLOCKING					
I _{RRM}	Repetitive peak reverse current, max	mA	50	T _j =T _{j max} ; V _R =V _{RRM}	
SWITCHING					
Q _{rr}	Total recovered charge, max	μC	150	I _{TM} =1000A, t _p =1000μs, -di/dt=60A/μs, V _R =50V	
t _{rr}	Reverse recovery time ¹⁾ , max	μs	4.00		
THERMAL					
R _{thjc}	Thermal resistance, junction to case, max	°C/W	0.0350	Clamping force 15.0kN	Double side cooled
R _{thck}	Thermal resistance, case to heatsink, max	°C/W	0.0080	Clamping force 15.0kN	Double side cooled
MECHANICAL					
w	Weight, max	g	250		

OVERALL DIMENSIONS

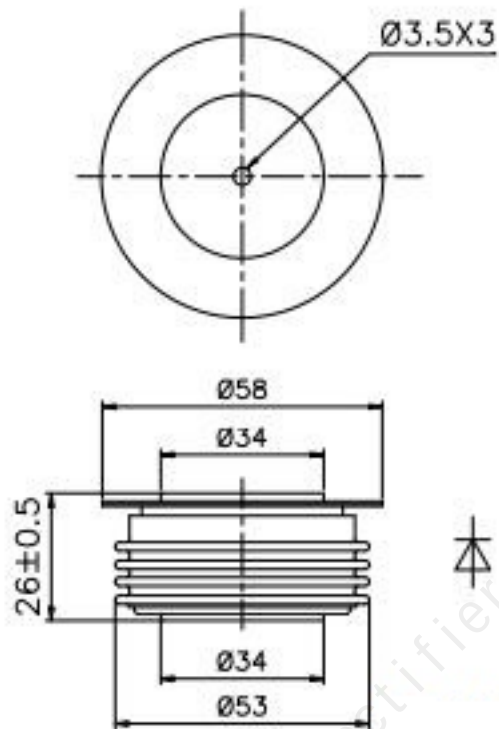

ZT40

All dimensions in millimeters