

● 浇注型 高压系列组件

Potting Type High Voltage Subassemblies



本品主要用于X光机，静电除尘电源等电子设备中作高压整流用。

0.1A 系列

0.1A Series

| 产品型号            | 反向重复峰值电压       | 正向平均电流          | 正向峰值电压            | 反向直流电流                             |                                         | 正向不重复浪涌电流     |
|-----------------|----------------|-----------------|-------------------|------------------------------------|-----------------------------------------|---------------|
|                 | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ (μA)                         |                                         | $I_{FSM}$ (A) |
|                 |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$                    |                                         |               |
|                 |                |                 |                   | $T_A = 25\text{ }^{\circ}\text{C}$ | $T_{oil} = 100\text{ }^{\circ}\text{C}$ |               |
| J2CL30KV/0.1A   | 30             | 0.1             | 36                | 5                                  | 50                                      | 3             |
| J2CL50KV/0.1A   | 50             | 0.1             | 60                | 5                                  | 50                                      | 3             |
| J2CL80KV/0.1A   | 80             | 0.1             | 96                | 5                                  | 50                                      | 3             |
| J2CL100KV/0.1A  | 100            | 0.1             | 120               | 5                                  | 50                                      | 3             |
| J2CL120KV/0.1A  | 120            | 0.1             | 144               | 5                                  | 50                                      | 2             |
| J2CL150KV/0.1A  | 150            | 0.1             | 180               | 5                                  | 50                                      | 2             |
| J2CL180KV/0.1A  | 180            | 0.1             | 216               | 5                                  | 50                                      | 2             |
| J2CL200KV/0.1A  | 200            | 0.1             | 240               | 5                                  | 50                                      | 2             |
| J2CL240KV/0.1A  | 240            | 0.1             | 288               | 5                                  | 50                                      | 2             |
| J2CL300KV/0.1A  | 300            | 0.1             | 360               | 5                                  | 50                                      | 2             |
| J2CLG30KV/0.1A  | 30             | 0.1             | 36                | 5                                  | 50                                      | 3             |
| J2CLG50KV/0.1A  | 50             | 0.1             | 60                | 5                                  | 50                                      | 3             |
| J2CLG80KV/0.1A  | 80             | 0.1             | 96                | 5                                  | 50                                      | 3             |
| J2CLG100KV/0.1A | 100            | 0.1             | 120               | 5                                  | 50                                      | 3             |
| J2CLG120KV/0.1A | 120            | 0.1             | 144               | 5                                  | 50                                      | 2             |
| J2CLG150KV/0.1A | 150            | 0.1             | 180               | 5                                  | 50                                      | 2             |
| J2CLG180KV/0.1A | 180            | 0.1             | 216               | 5                                  | 50                                      | 2             |
| J2CLG200KV/0.1A | 200            | 0.1             | 240               | 5                                  | 50                                      | 2             |
| J2CLG240KV/0.1A | 240            | 0.1             | 288               | 5                                  | 50                                      | 2             |
| J2CLG300KV/0.1A | 300            | 0.1             | 360               | 5                                  | 50                                      | 2             |

0.2A 系列

0.2A Series



| 产品型号            | 反向重复峰值电压       | 正向平均电流          | 正向峰值电压            | 反向直流电流                             |                                         | 正向不重复浪涌电流     |
|-----------------|----------------|-----------------|-------------------|------------------------------------|-----------------------------------------|---------------|
|                 | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ (μA)                         |                                         | $I_{FSM}$ (A) |
|                 |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$                    |                                         |               |
|                 |                |                 |                   | $T_A = 25\text{ }^{\circ}\text{C}$ | $T_{oil} = 100\text{ }^{\circ}\text{C}$ |               |
| J2CL30KV/0.2A   | 30             | 0.2             | 36                | 5                                  | 50                                      | 6             |
| J2CL50KV/0.2A   | 50             | 0.2             | 60                | 5                                  | 50                                      | 6             |
| J2CL80KV/0.2A   | 80             | 0.2             | 96                | 5                                  | 50                                      | 6             |
| J2CL100KV/0.2A  | 100            | 0.2             | 120               | 5                                  | 50                                      | 6             |
| J2CL120KV/0.2A  | 120            | 0.2             | 144               | 5                                  | 50                                      | 4             |
| J2CL150KV/0.2A  | 150            | 0.2             | 180               | 5                                  | 50                                      | 4             |
| J2CL180KV/0.2A  | 180            | 0.2             | 216               | 5                                  | 50                                      | 4             |
| J2CL200KV/0.2A  | 200            | 0.2             | 240               | 5                                  | 50                                      | 4             |
| J2CL240KV/0.2A  | 240            | 0.2             | 288               | 5                                  | 50                                      | 4             |
| J2CL300KV/0.2A  | 300            | 0.2             | 360               | 5                                  | 50                                      | 4             |
| J2CLG30KV/0.2A  | 30             | 0.2             | 36                | 5                                  | 50                                      | 6             |
| J2CLG50KV/0.2A  | 50             | 0.2             | 60                | 5                                  | 50                                      | 6             |
| J2CLG80KV/0.2A  | 80             | 0.2             | 96                | 5                                  | 50                                      | 6             |
| J2CLG100KV/0.2A | 100            | 0.2             | 120               | 5                                  | 50                                      | 6             |
| J2CLG120KV/0.2A | 120            | 0.2             | 144               | 5                                  | 50                                      | 4             |
| J2CLG150KV/0.2A | 150            | 0.2             | 180               | 5                                  | 50                                      | 4             |
| J2CLG180KV/0.2A | 180            | 0.2             | 216               | 5                                  | 50                                      | 4             |
| J2CLG200KV/0.2A | 200            | 0.2             | 240               | 5                                  | 50                                      | 4             |
| J2CLG240KV/0.2A | 240            | 0.2             | 288               | 5                                  | 50                                      | 4             |
| J2CLG300KV/0.2A | 300            | 0.2             | 360               | 5                                  | 50                                      | 4             |

0.5A 系列

0.5A Series

| 产品<br>型号         | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>平均电流        | 反向直流电流                             |                                         | 正向不重复浪<br>涌电流 |
|------------------|----------------|-----------------|-------------------|------------------------------------|-----------------------------------------|---------------|
|                  | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A )                  |                                         | $I_{FSM}$ (A) |
|                  |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$                    |                                         |               |
|                  |                |                 |                   | $T_A = 25\text{ }^{\circ}\text{C}$ | $T_{oil} = 100\text{ }^{\circ}\text{C}$ |               |
| J2CL10KV /0.5A   | 10             | 0.5             | 12                | 5                                  | 50                                      | 15            |
| J2CL15KV /0.5A   | 15             | 0.5             | 18                | 5                                  | 50                                      | 15            |
| J2CL20KV /0.5A   | 20             | 0.5             | 24                | 5                                  | 50                                      | 15            |
| J2CL30KV /0.5A   | 30             | 0.5             | 36                | 5                                  | 50                                      | 15            |
| J2CL50KV /0.5A   | 50             | 0.5             | 60                | 5                                  | 50                                      | 15            |
| J2CL80KV /0.5A   | 80             | 0.5             | 96                | 5                                  | 50                                      | 15            |
| J2CL100KV /0.5A  | 100            | 0.5             | 120               | 5                                  | 50                                      | 15            |
| J2CL120KV /0.5A  | 120            | 0.5             | 144               | 5                                  | 50                                      | 15            |
| J2CL150KV /0.5A  | 150            | 0.5             | 180               | 5                                  | 50                                      | 15            |
| J2CL180KV /0.5A  | 180            | 0.5             | 216               | 5                                  | 50                                      | 15            |
| J2CL200KV /0.5A  | 200            | 0.5             | 240               | 5                                  | 50                                      | 15            |
| J2CL240KV /0.5A  | 240            | 0.5             | 288               | 5                                  | 50                                      | 15            |
| J2CL300KV /0.5A  | 300            | 0.5             | 360               | 5                                  | 50                                      | 15            |
| J2CLG10KV /0.5A  | 10             | 0.5             | 12                | 5                                  | 50                                      | 15            |
| J2CLG15KV /0.5A  | 15             | 0.5             | 18                | 5                                  | 50                                      | 15            |
| J2CLG20KV /0.5A  | 20             | 0.5             | 24                | 5                                  | 50                                      | 15            |
| J2CLG30KV /0.5A  | 30             | 0.5             | 36                | 5                                  | 50                                      | 15            |
| J2CLG50KV /0.5A  | 50             | 0.5             | 60                | 5                                  | 50                                      | 15            |
| J2CLG80KV /0.5A  | 80             | 0.5             | 96                | 5                                  | 50                                      | 15            |
| J2CLG100KV /0.5A | 100            | 0.5             | 120               | 5                                  | 50                                      | 15            |
| J2CLG120KV /0.5A | 120            | 0.5             | 144               | 5                                  | 50                                      | 15            |
| J2CLG150KV /0.5A | 150            | 0.5             | 180               | 5                                  | 50                                      | 15            |
| J2CLG180KV /0.5A | 180            | 0.5             | 216               | 5                                  | 50                                      | 15            |
| J2CLG200KV /0.5A | 200            | 0.5             | 240               | 5                                  | 50                                      | 15            |
| J2CLG240KV /0.5A | 240            | 0.5             | 288               | 5                                  | 50                                      | 15            |
| J2CLG300KV /0.5A | 300            | 0.5             | 360               | 5                                  | 50                                      | 15            |

1A 系列

1A Series

| 产品<br>型号       | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>峰值电压        | 反向直流电流                             |                                         | 正向不重复浪<br>涌电流 |
|----------------|----------------|-----------------|-------------------|------------------------------------|-----------------------------------------|---------------|
|                | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A )                  |                                         | $I_{FSM}$ (A) |
|                |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$                    |                                         |               |
|                |                |                 |                   | $T_A = 25\text{ }^{\circ}\text{C}$ | $T_{oil} = 100\text{ }^{\circ}\text{C}$ |               |
| J2CL7.5KV /1A  | 7.5            | 1               | 11                | 5                                  | 50                                      | 30            |
| J2CL10KV /1A   | 10             | 1               | 12                | 5                                  | 50                                      | 30            |
| J2CL15KV /1A   | 15             | 1               | 18                | 5                                  | 50                                      | 30            |
| J2CL20KV /1A   | 20             | 1               | 24                | 5                                  | 50                                      | 30            |
| J2CL30KV /1A   | 30             | 1               | 36                | 5                                  | 50                                      | 30            |
| J2CL50KV /1A   | 50             | 1               | 60                | 5                                  | 50                                      | 30            |
| J2CL80KV /1A   | 80             | 1               | 96                | 5                                  | 50                                      | 30            |
| J2CL100KV /1A  | 100            | 1               | 120               | 5                                  | 50                                      | 30            |
| J2CL120KV /1A  | 120            | 1               | 144               | 5                                  | 50                                      | 30            |
| J2CL150KV /1A  | 150            | 1               | 180               | 5                                  | 50                                      | 30            |
| J2CL180KV /1A  | 180            | 1               | 216               | 5                                  | 50                                      | 30            |
| J2CL200KV /1A  | 200            | 1               | 240               | 5                                  | 50                                      | 30            |
| J2CL240KV /1A  | 240            | 1               | 288               | 5                                  | 50                                      | 30            |
| J2CL300KV /1A  | 300            | 1               | 360               | 5                                  | 50                                      | 30            |
| J2CLG7.5KV /1A | 7.5            | 1               | 11                | 5                                  | 50                                      | 30            |
| J2CLG10KV /1A  | 10             | 1               | 12                | 5                                  | 50                                      | 30            |
| J2CLG15KV /1A  | 15             | 1               | 18                | 5                                  | 50                                      | 30            |
| J2CLG20KV /1A  | 20             | 1               | 24                | 5                                  | 50                                      | 30            |
| J2CLG30KV /1A  | 30             | 1               | 36                | 5                                  | 50                                      | 30            |
| J2CLG50KV /1A  | 50             | 1               | 60                | 5                                  | 50                                      | 30            |
| J2CLG80KV /1A  | 80             | 1               | 96                | 5                                  | 50                                      | 30            |
| J2CLG100KV /1A | 100            | 1               | 144               | 5                                  | 50                                      | 30            |
| J2CLG120KV /1A | 120            | 1               | 144               | 5                                  | 50                                      | 30            |
| J2CLG150KV /1A | 150            | 1               | 180               | 5                                  | 50                                      | 30            |
| J2CLG180KV /1A | 180            | 1               | 216               | 5                                  | 50                                      | 30            |
| J2CLG200KV /1A | 200            | 1               | 240               | 5                                  | 50                                      | 30            |
| J2CLG240KV /1A | 240            | 1               | 288               | 5                                  | 50                                      | 30            |
| J2CLG300KV /1A | 300            | 1               | 360               | 5                                  | 50                                      | 30            |

2A 系列
2A Series

| 产品<br>型号      | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>峰值电压        | 反向直流电流                     |                                 | 正向不重复<br>浪涌电流 |
|---------------|----------------|-----------------|-------------------|----------------------------|---------------------------------|---------------|
|               | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A)           |                                 | $I_{FSM}$ (A) |
|               |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$            |                                 |               |
|               |                |                 |                   | $T_A = 25^{\circ}\text{C}$ | $T_{oil} = 100^{\circ}\text{C}$ |               |
| J2CL10KV/2A   | 10             | 2               | 12                | 10                         | 100                             | 60            |
| J2CL15KV/2A   | 15             | 2               | 18                | 10                         | 100                             | 60            |
| J2CL20KV/2A   | 20             | 2               | 24                | 10                         | 100                             | 60            |
| J2CL30KV/2A   | 30             | 2               | 36                | 10                         | 100                             | 60            |
| J2CL40KV/2A   | 40             | 2               | 48                | 10                         | 100                             | 60            |
| J2CL50KV/2A   | 50             | 2               | 60                | 10                         | 100                             | 60            |
| J2CL80KV/2A   | 80             | 2               | 96                | 10                         | 100                             | 60            |
| J2CL100KV/2A  | 100            | 2               | 120               | 10                         | 100                             | 60            |
| J2CLG10KV/2A  | 10             | 2               | 12                | 10                         | 100                             | 60            |
| J2CLG15KV/2A  | 15             | 2               | 18                | 10                         | 100                             | 60            |
| J2CLG20KV/2A  | 20             | 2               | 24                | 10                         | 100                             | 60            |
| J2CLG30KV/2A  | 30             | 2               | 36                | 10                         | 100                             | 60            |
| J2CLG40KV/2A  | 40             | 2               | 48                | 10                         | 100                             | 60            |
| J2CLG50KV/2A  | 50             | 2               | 60                | 10                         | 100                             | 60            |
| J2CLG80KV/2A  | 80             | 2               | 96                | 10                         | 100                             | 60            |
| J2CLG100KV/2A | 100            | 2               | 120               | 10                         | 100                             | 60            |

3A 系列
3A Series

| 产品<br>型号     | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>峰值电压        | 反向直流电流                     |                                 | 正向不重复浪<br>涌电流 |
|--------------|----------------|-----------------|-------------------|----------------------------|---------------------------------|---------------|
|              | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A)           |                                 | $I_{FSM}$ (A) |
|              |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$            |                                 |               |
|              |                |                 |                   | $T_A = 25^{\circ}\text{C}$ | $T_{oil} = 100^{\circ}\text{C}$ |               |
| J2CL10KV/3A  | 10             | 3               | 12                | 10                         | 100                             | 60            |
| J2CL15KV/3A  | 15             | 3               | 18                | 10                         | 100                             | 60            |
| J2CL20KV/3A  | 20             | 3               | 24                | 10                         | 100                             | 60            |
| J2CL30KV/3A  | 30             | 3               | 36                | 10                         | 100                             | 60            |
| J2CL50KV/3A  | 50             | 3               | 60                | 10                         | 100                             | 60            |
| J2CLG10KV/3A | 10             | 3               | 12                | 10                         | 100                             | 60            |
| J2CLG15KV/3A | 15             | 3               | 18                | 10                         | 100                             | 60            |
| J2CLG20KV/3A | 20             | 3               | 24                | 10                         | 100                             | 60            |
| J2CLG30KV/3A | 30             | 3               | 36                | 10                         | 100                             | 60            |
| J2CLG50KV/3A | 50             | 3               | 60                | 10                         | 100                             | 60            |

6A 系列
6A Series

| 产品<br>型号     | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>峰值电压        | 反向直流电流                     |                                 | 正向不重复浪<br>涌电流 |
|--------------|----------------|-----------------|-------------------|----------------------------|---------------------------------|---------------|
|              | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A)           |                                 | $I_{FSM}$ (A) |
|              |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$            |                                 |               |
|              |                |                 |                   | $T_A = 25^{\circ}\text{C}$ | $T_{oil} = 100^{\circ}\text{C}$ |               |
| J2CL10KV/6A  | 10             | 6               | 12                | 20                         | 200                             | 120           |
| J2CL15KV/6A  | 15             | 6               | 18                | 20                         | 200                             | 120           |
| J2CL20KV/6A  | 20             | 6               | 24                | 20                         | 200                             | 120           |
| J2CLG10KV/6A | 10             | 6               | 12                | 20                         | 200                             | 120           |
| J2CLG15KV/6A | 15             | 6               | 18                | 20                         | 200                             | 120           |
| J2CLG20KV/6A | 20             | 6               | 24                | 20                         | 200                             | 120           |

外形尺寸：可根据客户需求进行定制、设计。 备注：G 代表高频。

● 线路板型 高压系列组件    PCB Type High Voltage Subassemblies



主要用于原油脱水电源、静电除尘电源等电子设备中作高压整流作用。

线路板型产品规格参数

| 产品<br>型号         | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>峰值电压        | 反向直流电流             |                         | 正向不重复<br>浪涌电流 |
|------------------|----------------|-----------------|-------------------|--------------------|-------------------------|---------------|
|                  | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A )  |                         | $I_{FSM}$ (A) |
|                  |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$    |                         |               |
|                  |                |                 |                   | $T_A = 25^\circ C$ | $T_{oil} = 100^\circ C$ |               |
| J2CL150KV/0.1A   | 150            | 0.1             | 180               | 5                  | 50                      | 3             |
| J2CL240KC/0.1A   | 240            | 0.1             | 288               | 5                  | 50                      | 3             |
| J2*2CL100KV/0.1A | 2*200          | 0.1             | 2*120             | 5                  | 50                      | 3             |
| J2CL180KV/2A     | 180            | 2               | 216               | 10                 | 100                     | 60            |
| J2CL200KV/2A     | 200            | 2               | 240               | 10                 | 100                     | 60            |
| J2CL220KV/2A     | 220            | 2               | 268               | 10                 | 100                     | 60            |
| J2CL250KV/2A     | 250            | 2               | 300               | 10                 | 100                     | 60            |
| J2CL300KV/2A     | 300            | 2               | 360               | 10                 | 100                     | 60            |

半桥型产品 1A/ 2A/ 3A系列    Half-bridge Type Product

| 产品<br>型号       | 反向重复<br>峰值电压   | 正向<br>平均电流      | 正向<br>峰值电压        | 反向直流电流             |                         | 正向不重复<br>浪涌电流 |
|----------------|----------------|-----------------|-------------------|--------------------|-------------------------|---------------|
|                | $V_{RRM}$ (kV) | $I_{F(AV)}$ (A) | $V_{FM}$ (V)      | $I_R$ ( $\mu$ A )  |                         | $I_{FSM}$ (A) |
|                |                |                 | $I_F = I_{F(AV)}$ | $V_R = V_{RRM}$    |                         |               |
|                |                |                 |                   | $T_A = 25^\circ C$ | $T_{oil} = 100^\circ C$ |               |
| J2*2CL10KV/1A  | 2*10           | 1               | 2*12              | 5                  | 50                      | 30            |
| J2*2CL15KV/1A  | 2*15           | 1               | 2*24              | 5                  | 50                      | 30            |
| J2*2CL20KV/1A  | 2*20           | 1               | 2*36              | 5                  | 50                      | 30            |
| J2*2CL30KV/1A  | 2*30           | 1               | 2*60              | 5                  | 50                      | 30            |
| J2*2CLG10KV/1A | 2*10           | 1               | 2*12              | 5                  | 50                      | 30            |
| J2*2CLG15KV/1A | 2*15           | 1               | 2*24              | 5                  | 50                      | 30            |
| J2*2CLG20KV/1A | 2*20           | 1               | 2*36              | 5                  | 50                      | 30            |
| J2*2CLG30KV/1A | 2*30           | 1               | 2*60              | 5                  | 50                      | 30            |
| J2*2CL10KV/2A  | 2*10           | 2               | 2*12              | 5                  | 50                      | 30            |
| J2*2CL15KV/2A  | 2*15           | 2               | 2*24              | 5                  | 50                      | 30            |
| J2*2CL20KV/2A  | 2*20           | 2               | 2*36              | 5                  | 50                      | 30            |
| J2*2CL30KV/2A  | 2*30           | 2               | 2*60              | 5                  | 50                      | 30            |

半桥型产品 1A/ 2A/ 3A系列

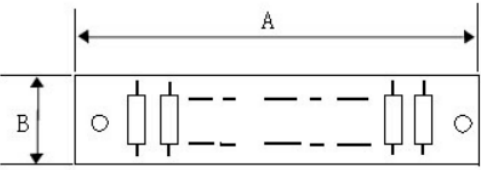
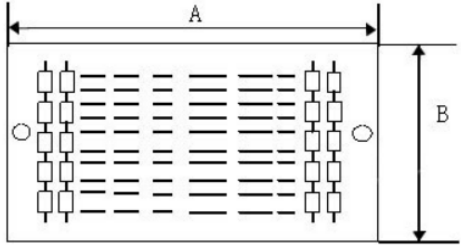
Half-bridge Type Product

|                 |      |   |      |   |    |    |
|-----------------|------|---|------|---|----|----|
| J2*2CLG 10KV/2A | 2*10 | 2 | 2*12 | 5 | 50 | 30 |
| J2*2CLG 15KV/2A | 2*15 | 2 | 2*24 | 5 | 50 | 30 |
| J2*2CLG 20KV/2A | 2*20 | 2 | 2*36 | 5 | 50 | 30 |
| J2*2CLG 30KV/2A | 2*30 | 2 | 2*60 | 5 | 50 | 30 |
| J2*2CL 10KV/3A  | 2*10 | 3 | 2*12 | 5 | 50 | 30 |
| J2*2CL 15KV/3A  | 2*15 | 3 | 2*24 | 5 | 50 | 30 |
| J2*2CL 20KV/3A  | 2*20 | 3 | 2*36 | 5 | 50 | 30 |
| J2*2CL 30KV/3A  | 2*30 | 3 | 2*60 | 5 | 50 | 30 |
| J2*2CLG 10KV/3A | 2*10 | 3 | 2*12 | 5 | 50 | 30 |
| J2*2CLG 15KV/3A | 2*15 | 3 | 2*24 | 5 | 50 | 30 |
| J2*2CLG 20KV/3A | 2*20 | 3 | 2*36 | 5 | 50 | 30 |
| J2*2CLG 30KV/3A | 2*30 | 3 | 2*60 | 5 | 50 | 30 |



线路板型外形尺寸:

(单位:mm)

| 示意图                                                                                   | 型号               | A   | B    |
|---------------------------------------------------------------------------------------|------------------|-----|------|
|   | J2CL150KV/0.1A   | 112 | 25.5 |
|                                                                                       | J2CL240KV/0.1A   | 156 | 25.5 |
|  | J2*2CL100KV/0.1A | 165 | 25.5 |
|                                                                                       | J2CL180KV/2A     | 304 | 84   |
|                                                                                       | J2CL200KV/2A     | 304 | 84   |
|                                                                                       | J2CL220KV/2A     | 304 | 84   |
|                                                                                       | J2CL250KV/2A     | 304 | 84   |
|                                                                                       | J2CL300KV/2A     | 304 | 84   |

另外可根据用户要求提供各种规格的高压硅堆、整流半桥、整流桥。